

CAMSO 4L 13




TELEHANDLERS



WHEEL
LOADERS



MINI-
DUMPERS

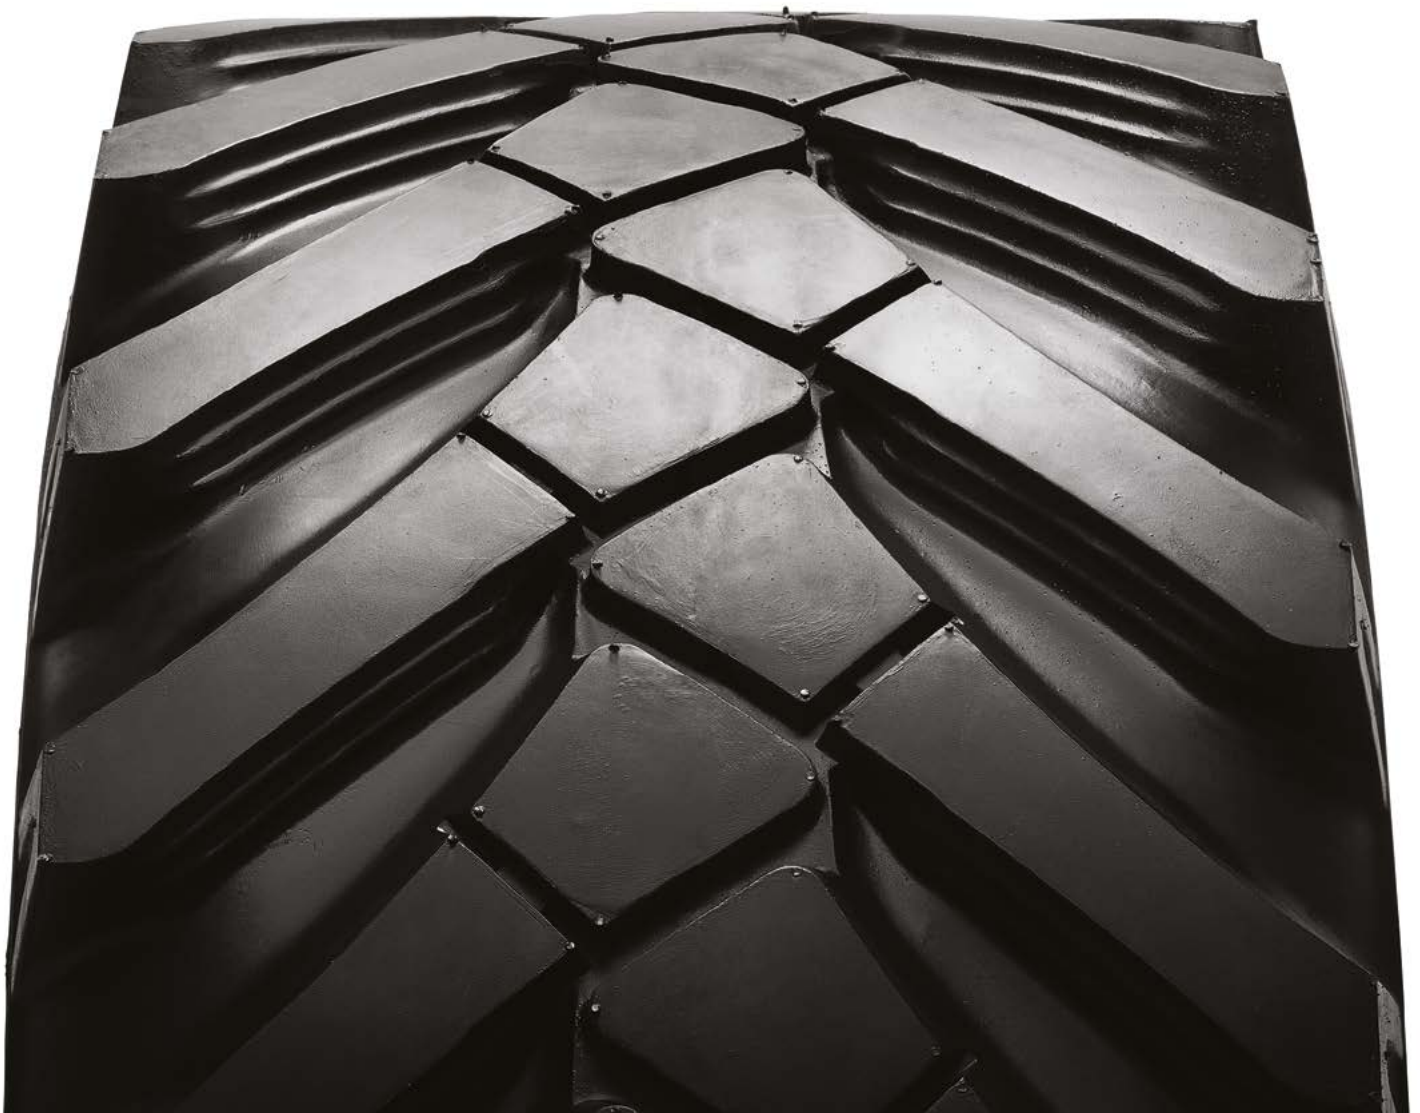

Gumiabroncs élettartam



Defektellenálló képesség




Vontatási képesség



CAMSO

ROAD
FREE
COMPANY

CAMSO 4L13



VERSATILE DIRECTIONAL TREAD PATTERN WITH CENTER BLOCK

- Reduces vibrations and enhances driving comfort

HAULER STEPPED TREAD DESIGN

- Maximizes tread cleanout in off-road conditions for improved traction



OPEN SHOULDER TREAD DESIGN

- Provides excellent traction in off-road conditions

HEAVY-DUTY CARCASS

- Provides excellent stability and side impact resistance

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TRA CODE	APPLICATION	MAXIMUM TIRE LOAD [kg]							
											On other vehicles					On counterbalanced lift trucks		
											Inflation pressure [bar]	Creep	10 km/h	15 km/h	50 km/h	Inflation pressure [bar]	Load wheel	Steering wheel
10.0/75-15.3	8	9 x 15.3	-	797	265	29	119	A8	R-4	FREE	3,10	2245	1905	1810	1225	4,25	1945	1630
				797	265	29	106			DRIVE	3,10	2245	1330	1265	855	4,25	1945	1630
11.5/80-15.3	10	9 x 15.3	-	847	294	25	131	A8	R-4	FREE	3,40	3220	2730	2595	1755	4,75	2790	2340
				847	294	25	119			DRIVE	3,40	3220	1905	1810	1225	4,75	2790	2340
10.5-18	10	9x18	9SDC	891	269	25	126	B	R-4	-	3,75	4250	3060	2805	1905	4,50	3060	2550
12.5-18	12	11x18	11SDC 12SDC 12	989	335	22	131	B	R-4	-	3,50	4250	-	-	1905	4,25	3510	2925
10.5-20	10	9x20	9SDC	950	278	22	128	B	R-4	-	3,50	5000	7150	6550	2240	4,25	3600	3000
12.5-20	12	11x20	11SDC 12SDC 12	1054	348	23	132	B	R-4	-	3,50	5000	7150	6550	2240	4,25	3600	3000
14.5-20	14	11x20	11SDC 12SDC 12	1107	359	27	138	B	R-4	-	3,50	5900	7950	7300	2645	4,25	4250	3540
405/70-20 (16/70-20)	14	13x20	13SDC	1081	442	26	154	A8	R-4	FREE	3,50	6190	9400	8600	3375	5,50	5365	4500
				1081	442	26	142			DRIVE	3,50	6230	11600	11000	2385	5,50	5365	4500
405/70-24 (16/70-24)	14	13x24	13SDC	1188	421	27	156	A8	R-4	FREE	3,50	6600	8200	7800	3600	4,50	5720	4800
				1188	421	27	144			DRIVE	3,50	6580	12350	11750	2520	4,50	5720	4800